




# CS&P Technologies

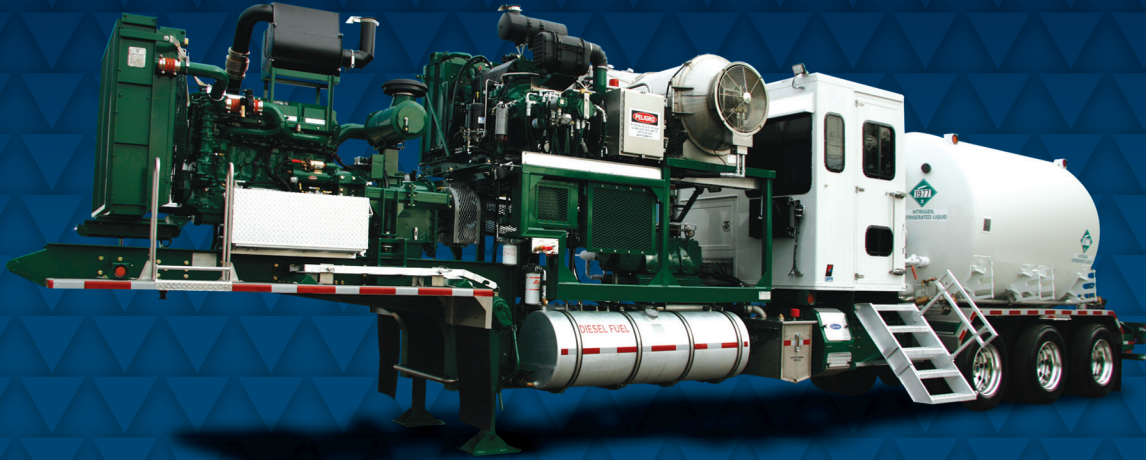

## 720,000 SCFH Nitrogen Trailer

*CS&P's 720,000 SCFH Direct Fired Nitrogen Trailer is the industry leader in performance and efficiency. Attention to detail and quality manufacturing ensure your satisfaction with our products.*

*CS&P's ultra efficient vaporization system ensures maximum heating of the nitrogen using minimum HP. Our advanced technology lowers operating cost and maintenance making our unit the most reliable in the industry.*

*Each unit is designed and manufactured to operate at maximum rated capacity, everyday.*

18119 Telge Road • Cypress, Texas 77429  
Office (713) 467-0869 • Fax (713) 464-2089  
[www.csphouston.com](http://www.csphouston.com)

### PERFORMANCE SPECIFICATIONS

- Fluids Pumped: Nitrogen
- Maximum Flow Rate: 12,000 SCFM (128 GPM)
- Maximum Working Pressure: 10,000 PSI with option for 15,000 PSI

### CS&P MANUFACTURED NITROGEN COMPONENTS

#### Triplex Pump

- 3-ICP-600 Counter Balanced Power End with 2.33:1 Gear Reduction Box
- Cold End Sizes: 2.00" to 3.25" Diameter
- Unloader Cold Ends are available as an option

#### Centrifugal Pump

- 2" x 3" x 6.7" Mechanical Seal or "Sealless" Magnetic Drive Option

#### Vaporizer

- 720,000 SCFH Direct Fired Vaporizer

### CONTROL SYSTEM

- Manual Ground Operation to Fully Automated System in Climate Controlled Cabin